


**1.4" x 1.2 x 0.6"**  
**35.56mm x 30.48mm x 15.24mm**

## Specifications

	Minimum	Maximum
RoHS Compliant	Yes	
Compatible Simple Step Boards	All Simple Step -4x boards	
Ambient Temperature Range		
Operating:	0 degrees C (32 degrees F)	+70 degrees C (158 degrees F)
Storage:	-40 degrees C (-40 degrees F)	+125 degrees C (257 degrees F)
Maximum Controller Boards on One (1) Serial Line	255	
Communications:	RS422 and RS485	
Communication Baudrates:	9600, 19200, 38400, 57600, 115200, 230400, 460800	
PCB Flammability Rating:	UL 94V-0	

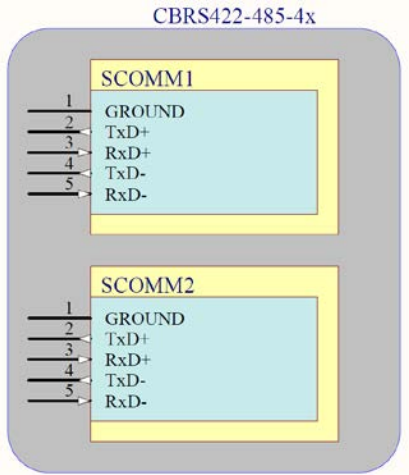

Connector Name	Connector Type	Mating Connector P/N
SCOMM1	AMP MTA / Molex KK	640456-5 / 22-01-2057
SCOMM2	AMP MTA / Molex KK	640456-5 / 22-01-2057
Contacts	Molex KK	08-50-0114



**For more information or to place an order, please go to our website at [www.simplestep.com](http://www.simplestep.com)**

The specifications in this publication are believed to be accurate and reliable. However, it is the responsibility of the product user to determine the suitability of any Simple Step® product for a specific application. While defective products will be replaced without charge if promptly returned, no liability is assumed beyond such replacement. Simple Step® - Motion Control made Simple!®

12 West Owassa Turnpike, Newton, NJ 07860 USA Phone: 973-948-2938 Fax: 973-948-0182