

USB 2.0 Virtual Serial Communications Module (CBUSB-4x)



Specifications


	Minimum	Maximum
RoHS Compliant	Yes	
Compatible Simple Step Boards	All Simple Step -4x boards	
Ambient Temperature Range		
Operating:	0 degrees C (32 degrees F)	+70 degrees C (158 degrees F)
Storage:	-40 degrees C (-40 degrees F)	+125 degrees C (257 degrees F)
Maximum Controller Boards on One (1) Serial Line	1	
Communications:	Standard USB 2.0 Virtual Serial Port	
Communication Baudrates:	9600, 19200, 38400, 57600, 115200, 230400, 460800	
PCB Flammability Rating:	UL 94V-0	



For more information or to place an order, please go to our website at www.simplestep.com

The specifications in this publication are believed to be accurate and reliable. However, it is the responsibility of the product user to determine the suitability of any Simple Step® product for a specific application. While defective products will be replaced without charge if promptly returned, no liability is assumed beyond such replacement. Simple Step® - Motion Control made Simple!®

12 West Owassa Turnpike, Newton, NJ 07860 USA Phone: 973-948-2938 Fax: 973-948-0182

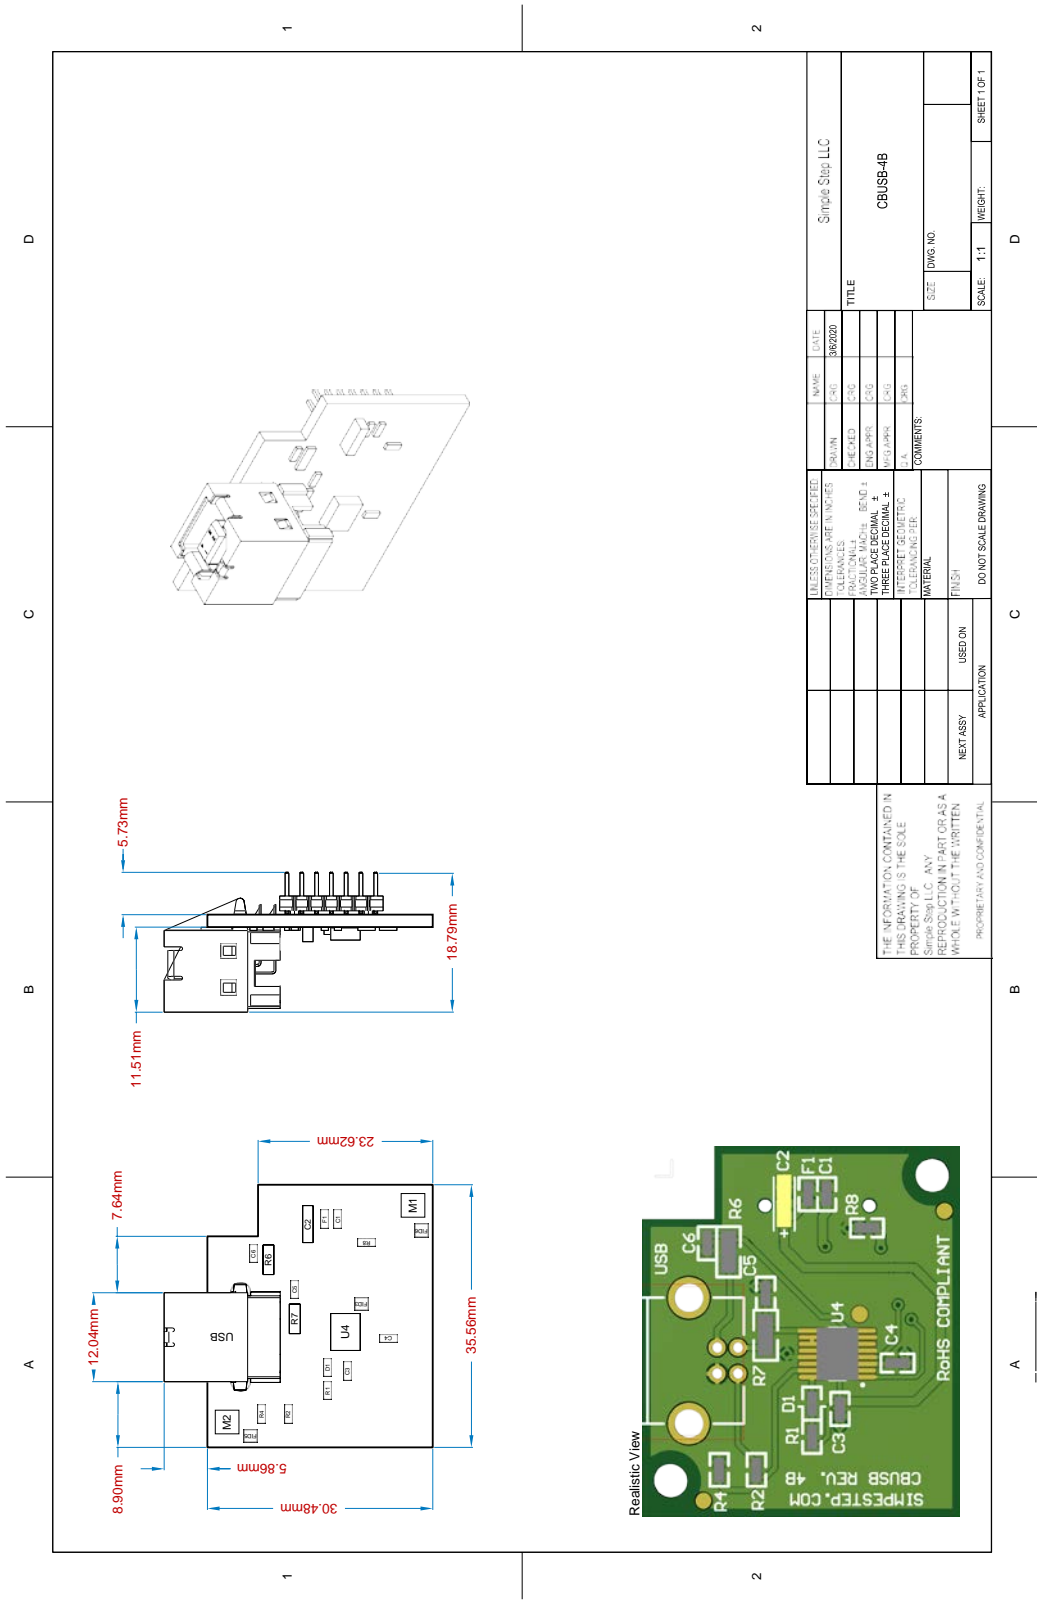

For more information or to place an order, please go to our website at www.simplestep.com

The specifications in this publication are believed to be accurate and reliable. However, it is the responsibility of the product user to determine the suitability of any Simple Step® product for a specific application. While defective products will be replaced without charge if promptly returned, no liability is assumed beyond such replacement. Simple Step® - Motion Control made Simple!®

12 West Owassa Turnpike, Newton, NJ 07860 USA Phone: 973-948-2938 Fax: 973-948-0182